


# T3M

## MAIN FEATURES

- High equability · long life.
- Pull-in on delay.
- Adopt LSI, high precision.
- Led show power on and time reach.
- 4 Time range.
- Plug in installation.





## ORDERING INFORMATION

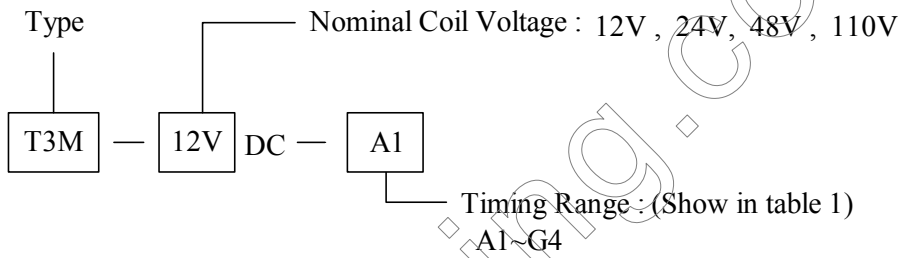

## DIMENSION (unit:mm)

## WIRING DIAGRAM

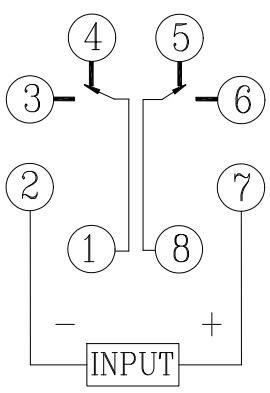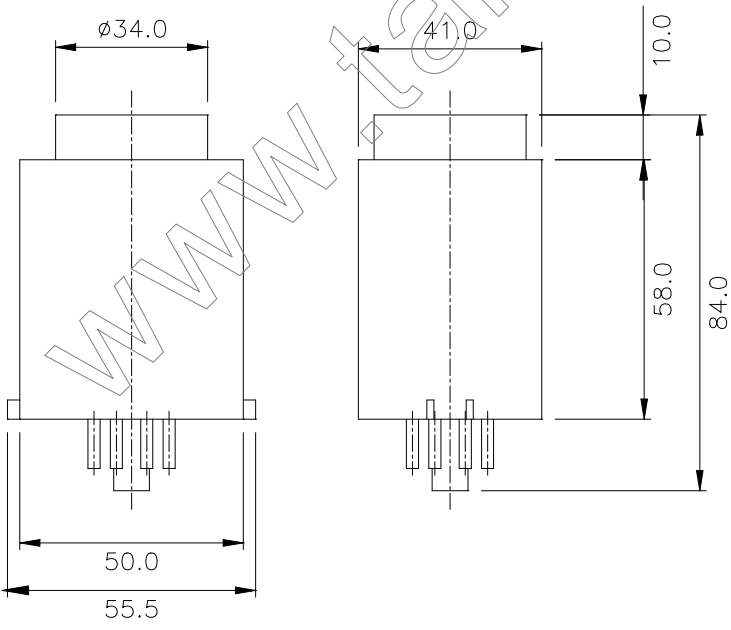

## ■ TIMING RANGE

Table 1

CODE	1	2	3	4
A	0.05~0.5s	~5s	~30s	~3min
B	0.1~1s	~10s	~60s	~6min
C	0.5~5s	~50s	~5min	~30min
D	1~10s	~100s	~10min	~60min
E	6~60s	~10min	~60min	~6h
F	0.2~6min	~20min	~2h	~12h
G	0.4~4min	~40min	~4h	~24h

## ■ SPECIFICATION

Nominal Power voltage	12VDC、24VDC、48VDC、110VDC
Timing range	0.05s-24h
Timing tolerance	± (5%+50ms)
Repeat accuracy	± (0.5%+10ms)
Contact Rating	3A 240VAC
Operating voltage	(85%~110%) of nominal voltage
Input current	60mA
Reset time	100ms
ON/OFF frequency	1800 Times/h
Mechanical Life	$5 \times 10^7$ OPS
Electrical Life	$10^6$ OPS
Ambient Temperature	-10~55°C
Dimensions	55.5mm × 41mm × 84mm
Weight	100grs.
Installation way	Plug in terminals
Working position	Any position
Insulation Resistance	100 MΩ (500VDC)
Dielectric Strength	Between coil and Contacts 2000VAC, 1min
	Between circuits 1500VAC, 1min
	Between Contact sets 1000VAC, 1min

## ■ DELAY OSCILLOGRAM.

